

GDL1329

LG DRYER FOR MULTI-HOUSING FACILITIES

Offering more drying capacity and performance in a smaller footprint, LG Platinum Dryers take on more laundry and deliver improved drying performance, as well as fewer wrinkles and tangles.

The control offers a digital display that details vend price and cycle time countdown. Users select one of the four fabric options — White and Color (high heat), Perm Press (medium heat), Delicates & Knits (low heat) or No Heat — and press start. Stack washer/dryer models available.



PRODUCT FEATURES

- End-of-Cycle Tone
- Door Lock Display
- Self Diagnostics
- Front Steel Control Panel
- Frontload
- Soft-Mount Design
- Streamlined Design
- Remaining Time Display
- Status Indicator
- Extra Large Capacity Coin Box
- Easy Front Panel Access for Maintenance & Service
- Coin Box Open Sensing
- Extra-large Door Opening Makes for Simple Loading & Unloading
- Top-mounted, Simple-to-clean, Four-tray Automatic Chemical Dispenser
- Adjustable Leveling Legs
- Can be stacked with matching LG Washer or Dryer







GDL1329

LG CARD- & COIN-OPERATED DRYER

ARCHITECTURAL/MECHANICAL PRODUCT SPECIFICATIONS

PRODUCT SPECS

Cylinder	Gas	Electric
Capacity <i>lbs (kg)</i>	22.5 (10.2)	22.5 (10.2)
Cylinder Diameter <i>inch (mm)</i>	26.1 (663)	26.1 (663)
Cylinder Depth <i>inch (mm)</i>	22.5 (570.6)	22.5 (570.6)
Cylinder Volume <i>cu ft (l)</i>	7.1 (201)	7.1 (201)
Dimensions & Weight		
Net Weight <i>lb (kg)</i>	130 (59)	130 (59)
Crated Weight <i>lb (kg)</i>	143 (65)	143 (65)
Machine (WxDxH) <i>inch (mm)</i>	27 x 30.1 x 38.7 (686 x 764 x 983)	27 x 30.1 x 38.7 (686 x 764 x 983)
Machine Depth w/door opening <i>inch (mm)</i>	49.8 (1264)	49.8 (1264)
Shipping Dimensions <i>inch (mm)</i> (WxDxH)	29.7 x 31.3 x 46.1 (755 x 795 x 1170)	29.7 x 31.3 x 46.1 (755 x 795 x 1170)
Operation		
Heating Type	Gas	Electric
Motor <i>kW</i>	0.4(120V/60Hz)	0.4(120V/60Hz)
Gas Ratings <i>BTU/h</i>	20,000	—
Heating Element <i>W</i>	—	5,400
Program Duration (default) <i>mins</i>	45	45
Connections		
Air outlet diameter <i>inch (mm)</i>	4 (100)	4 (100)
Exhaust airflow <i>CFM</i>	160	160
Circuit Protection <i>V/Hz/Ph Amps</i>	120/60/1 15 Amps	208/240/60/1 30 Amps
System & Control		
Pricing Program	Special Vended Price	Special Vended Price
Intelligent Electronic Controls	•	•
Convenience Features		
End of Cycle Tone	•	•
Heater Type	—	Multi-Level Control
Gas Valve Type	On/Off	•
Reversible Door	•	•
Remaining Time Display	•	•
Self Diagnosis	•	•
Status Indicator	•	•
4 Adjustable Leveling Legs	•	•
Coin Box Sensing	•	•
External Finish		
Top Plate	Porcelain (Single) / Painted Steel (Stack)	Porcelain (Single) / Painted Steel (Stack)
Window Display	Silk Screen	Silk Screen
Window	Aluminum	Aluminum
Colors	Platinum/White	Platinum/White
Cabinet	Painted Steel	Painted Steel
Control Panel	Painted Steel	Painted Steel

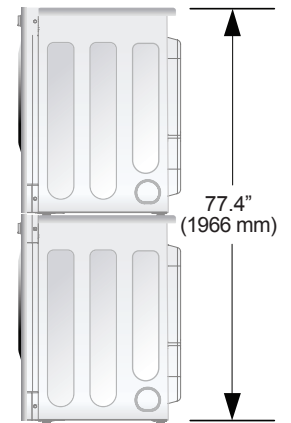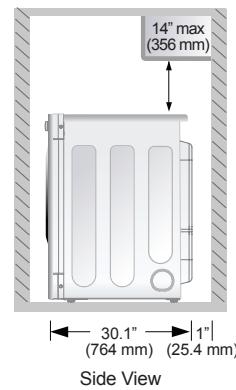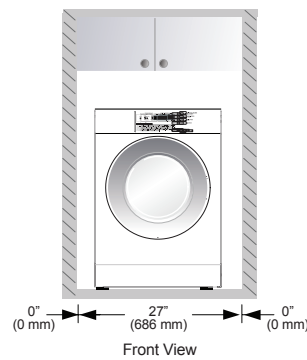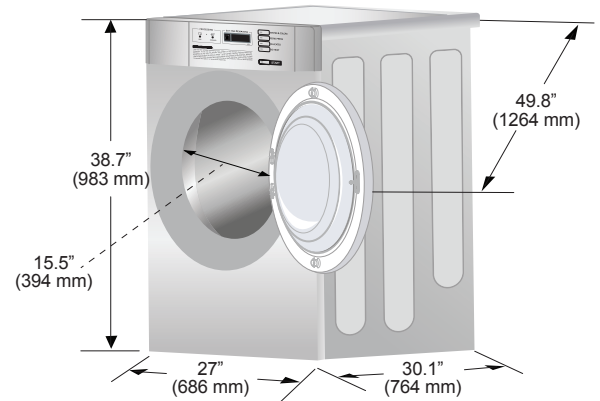

* Product specifications are subject to change without notice. Please contact Continental Girbau for the most current and complete technical specifications, architectural line drawings and warranty information.