

GCWF1069

LG WASHER FOR MULTI-HOUSING LAUNDRY FACILITIES

Energy Star qualified, LG Platinum Washers are engineered for effective, efficient and quiet operation. LG Washers use just 11.2 gallons of water per load and harness auto-balancing and inverter-drive systems for reliable, smooth operation. The LG Washer control allows programming of vend price, cycle time, cycle parameter and spin speed, while the NeverRust™ Stainless Wash Tub delivers durability for years of continued use. Simple to use, LG Washers offer a modern, clean look. Stack washer/dryer models available.

WASH PROGRAMS

- Hot
- Warm
- Cold
- Delicates
- SuperWash

PRODUCT FEATURES

- End-of-Cycle Tone
- Door Lock Display
- Self Diagnostics
- Auto Balancing
- Auto Suds Removal
- Inverter Direct Drive
- Front Steel Control Panel
- Frontload
- Soft-Mount Design
- Streamlined Design
- Remaining Time Display
- Status Indicator
- Low Decibel Quiet Operation
- Coin Box Open Sensing
- Extra Large Capacity Coin Box
- Easy Front Panel Access for Maintenance & Service
- Extra-large Door Opening Makes for Simple Loading & Unloading
- Top-mounted, Simple-to-clean, Four-tray Automatic Chemical Dispenser
- Adjustable Leveling Legs
- Three Water Levels
- Pump Drain System
- Can be stacked with matching LG Dryer




GCWF1069

LG HIGH-EFFICIENCY FRONT-LOADS CARD- & COIN-OPERATED WASHER

ARCHITECTURAL/MECHANICAL
PRODUCT SPECIFICATIONS

PRODUCT SPECS

Cylinder	
Capacity lbs (kg)	22.5 (10.2)
Cylinder Diameter inch (mm)	22.1 (560)
Cylinder Depth inch (mm)	16.5 (419.3)
Cylinder Volume cu ft (l)	3.6 (102.7)
Dimensions & Weight	
Net Weight lb (kg)	191.8 (87)
Crated Weight lb (kg)	211.6 (96)
Machine (WxDxH) inch (mm)	27 x 30.2 x 38.7 (686 x 767 x 983)
Machine Depth w/door opening inch (mm)	50.8 (1291)
Shipping Dimensions (WxDxH) inch (mm)	29.7 x 31.3 x 44.4 (755 x 795 x 1127)
Speed	
Washing Speed rpm	50
Extract (High Speed) rpm	1150
G-force	413
Water Usage	
Water Consumption gal (l)	13.4 (50.8)
Noise & Cycle Time	
Noise Level (Sound Power) dB	Lower than 62
Program Duration (default) mins	36
System & Control	
Inverter Direct Drive Motor	•
Intelligent Electronics Controls	•
3 Compartment Dispenser	•
Forced Drain System	•
Pricing Program	Special Vended Price
External Finish	
Drum	Stainless Steel Drum
Top Plate	Porcelain (Single) /Painted Steel (Stack)
Transparent Glass Window Door	•
Colors	Platinum/White
Cabinet	Painted Steel
Control Panel	Painted Steel
Connections	
Available Voltages V/Hz/Ph	120/60/1
PCB Fuse - Main Control Board amps	12
PCB Fuse - Filter Assembly amps	15
Hose	
Inlet Hose ft (mm)	4.92 (1500)
Drain Hose ft (mm)	6.56 (2000)
Modified Energy Factor (MEF)*	2.6
Water Consumption Factor (WCF)*	3.7

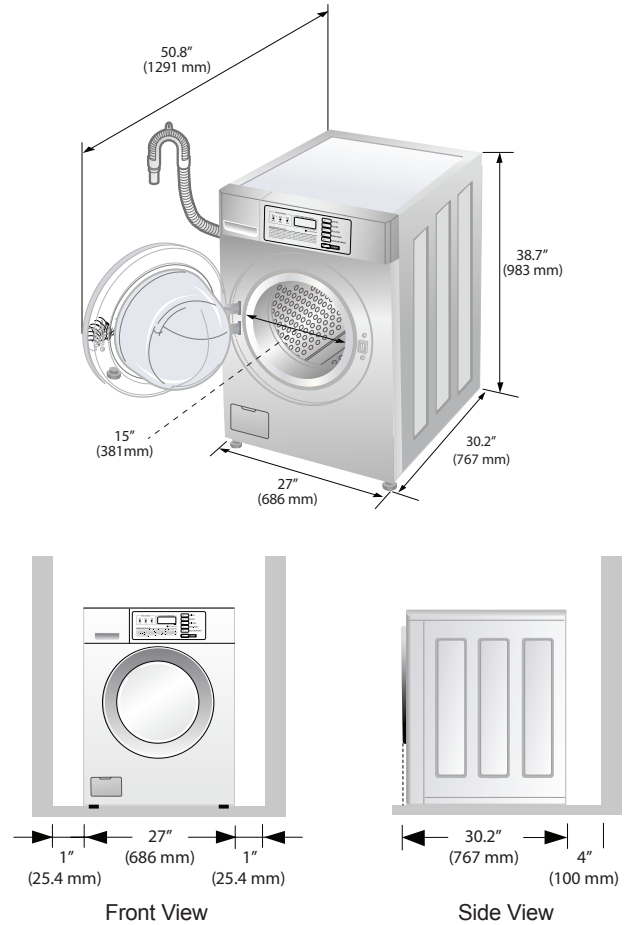

** Modified Energy Factor (MEF) measured in cubic feet per kilowatt-hour per cycle. Water Consumption Factor (WCF) measured in gallons per cycle per cylinder cubic feet. MEF and WCF statistics are according to Department of Energy (DOE) testing standards report by LG Commercial Laundry.

** Product specifications are subject to change without notice. Please contact Continental Girbau for the most current and complete technical specifications, architectural line drawings and warranty information.